



1,250kVA Soundproof Generator



Features

- Noise Level @ 1m, 83dBA
- Autostart DSE CP
- Motorised MCCB rated at 2,000A
- VELCB
- Micro Switch Protection over Buss Bar Door
- Oil Extraction Pump
- 3 Way Fuel Valve
- Battery Isolator
- Water Separator Std
- Four Point Lift
- Fork Lift Pockets
- Fully Bunded
- Battery Charger

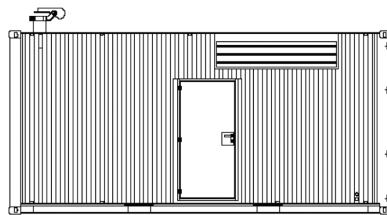

Options

- Bulk Fuel Tank



Power Solutions Nationwide

ABIRD has a policy of continuous improvement and therefore reserve the right to change the specification without prior notice.

Head Office: ABIRD Ltd. Ramsgate Road, Sandwich, Kent, CT13 9ND

Generating Set	50 Hz	60 Hz
Continuous Power	1250 kVA	1418 kVA
Standby Power	1375 kVA	1610 kVA
Noise Level @ 1m	83 dBA	
Power Factor	cos φ 0.8	
Continuous Power	1,040 kWe	1,180 kWe
Standby Power	1,145 kWe	1,340 kWe
Amps 3 Phase	1,740 A	
Fuel consumption 70% load	185 l/h	207 l/h
Engine	1500 rpm	1800 rpm
Model	Cummins KTA50G3	
Continuous Power	1074 kWm	
Standby Power	1204 kWm	
Aspiration	Turbocharged	
Cooling System	Water	
Speed Governor	Electronic	
Cylinder Number	16	
Displacement	50,300 cm ³	
Logistic Information	GQ1400C-C20H	
Fuel Tank	600 ltr	
Weight (Wet)	15,400 kg	
Dimensions (L x W x H)	Container 20 ft high cube	
Control Panel	Deep Sea 7510	
Auto Start	Standard	



Deep Sea 7510 Loadshare Control Panel

