

# 200kVA Soundproof Generator




## Features

- Noise Level @ 1m, 75dBA (@7m, 63dBA)
- Autostart DSE CP with MCCB
- VELCB
- Micro Switch Protection over Buss Bar Door
- Oil Extraction Pump
- 3 Way Fuel Valve
- Battery Isolator
- Water Separator Std
- Cental Lifting Hook
- Fork Lift Pockets
- Fully Bunded

## Options

- Bulk Fuel Tank
- Battery Charger
- Deep Sea 7510 Loadshare

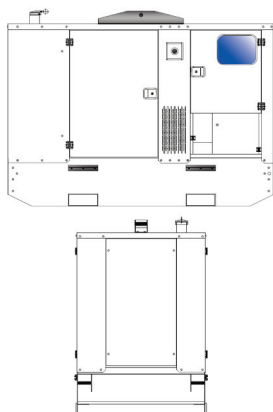

**Power Solutions Nationwide**

ABIRD has a policy of continuous improvement and therefore reserve the right to change the specification without prior notice.

Head Office: ABIRD Ltd. Ramsgate Road, Sandwich, Kent, CT13 9ND

Generating Set	50 Hz	60 Hz
Continuous Power	200 kVA	230 kVA
Standby Power	220 kVA	253 kVA
Noise Level @ 1m / 7m	75 dBA / 63 dBA	
Power Factor	cos φ 0.8	
Continuous Power	160 kWe	191 kWe
Standby Power	176 kWe	210 kWe
Amps 3 Phase	278 A	
Fuel consumption 70% load	29.5 l/h	34 l/h
<b>Engine</b>	<b>1500 rpm</b>	
Model	John Deere 6068HFU74	
Continuous Power	178 kWm	
Standby Power	197 kWm	
Aspiration	Turbocharged	
Cooling System	Water	
Speed Governor	Electronic	
Cylinder Number	6	
Displacement	6,800 cm <sup>3</sup>	
<b>Logistic Information</b>	<b>GX221JDE</b>	
Fuel Tank	400 ltr	
Weight (Wet)	2,940 kg	
Dimensions (L x W x H)	335 x 110 x 217 cm	
<b>Control Panel</b>	<b>Deep Sea 7310</b>	
Auto Start	Standard	



Deep Sea 7310 Control Panel

